



OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 34 TOWNSHIP 15 RANGE 5
DATE: -6-5-01 10-04-06
PARTY CHIEF: Kiste
CREW: _____
TYPE OF MARKER: Copperweld set
METHOD OF ESTABLISHMENT: County:
NEW SECTION TIE

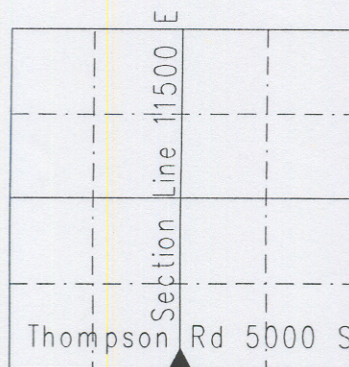

IN.S.P.C. E ZONE NAD '83

Name: **15053408**
N: **493907.0590(m)**
E: **74753.3070(m)**

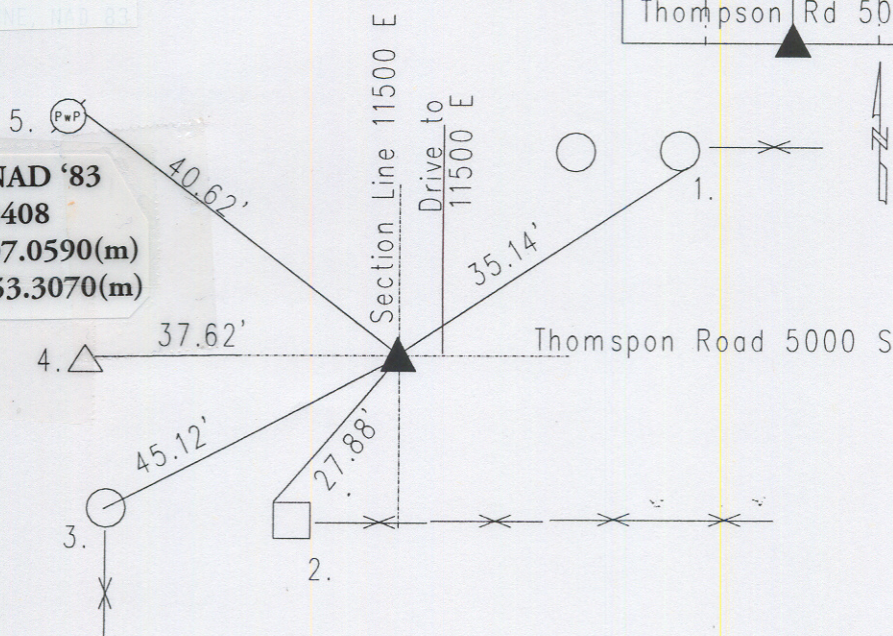

Original post set 1820 by Hendricks with witness: 15" beech N 16 W 27 links; 14" dogwood S 45 W 13 links per Marion County Atlas pg. 14. Hosbrook 8-23-1852 called no stone but witness: 20" cherry S 54 E 39 links; 14" cherry N 67 E 2 links per Franklin Township Legal Survey Book pg. 13. Hosbrook 6-17-1856 called no stone nor witness per Franklin Township Legal Survey Book pg. 15. Hosbrook 10-1887 called no witness but rock called on drawing per Franklin Township Legal Survey Book pg. 58. since, 1856, 1887 and 1967 locations of this corner agreed to within 2.15' of each other, the Q-Q line had been established since 1856, no line of occupation or boundary record was found running north of the south corner. No record distance was found to the north or south of the south corner. South Q 34-15-5 was reset by MCSO at the shortest record distance (1887) 0.57 chains (37.62) feet east of the north corner of 3-14-5 and on line between the north of 3-14-5 and the southeast of 34-15-5: 6-5-01 a copperweld was set as the corner by Kiste.

REF.	DISTANCE	DESCRIPTION
1.	35.14'	Mag nail w/brass washer SE wooden fence post 10"up
2.	27.88'	Mag nail w/brass washer NW wooden fence post 12"up
3.	45.12'	Cut 'x' top of 12' concrete fence post
4.	37.62'	Due W to N Q 3-14-5 (Railroad spike)
5.	40.62'	Mag nail w/brass washer NE PwP#22=711 E 12"up